# SG-23/30
Central Granulator

SHINI EUROPE

Integrated blower with cyclone
ensures easy material collecting

Adjusment loading shelf
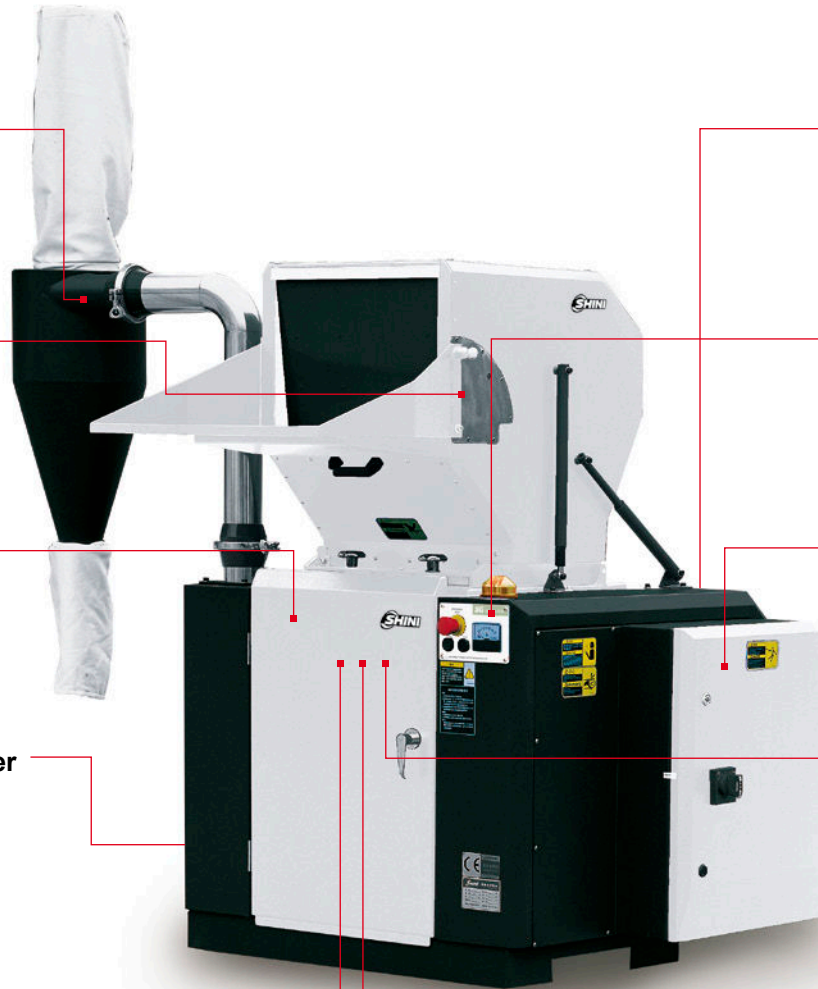in two positions gives a possibility to comfortable granulating process

Low noise structure
ensures low noise level

Colling cutting chamber
ensures easy low temperature material granulating (only in SG-30)

WEG motor
energy-saving, IE2 class

Full receive alarm
device informs about granulator overloading

Phase sequence sensor
ensures correct direction of the main motor rotation

Profile
designed for quick blade replacement with easy rotating blades adjustment (only in SG-30)

Paddle blades
(only in SG-30)

Staggered blades
(only in SG-23)